

S Series

NOTHING PERFORMS
LIKE A HAUSCHILD SPEEDMIXER®

BLENDING RELIABILITY, EFFICIENCY,
ACCURACY & SAFETY BEAUTIFULLY



DAC 150.1 / 250.1

STANDARD FEATURES ON ALL DAC MACHINES

150 | 250 | 400 | 600 | 700 | 800 | 1100 | 3000 | 5000 | 10000



THE GOLD
STANDARD
IN BLADELESS
MIXING

LEGENDARY
ACCURACY &
REPEATABILITY

UNPARALLELED
QUALITY &
RELIABILITY

FAST, EFFICIENT,
VIRTUALLY
INDESTRUCTIBLE

NO
CLEANING
REQUIRED

CUSTOM
CONFIGURATIONS
& SOLUTIONS

Hauschild GmbH & Co. KG

info@hauschild-speedmixer.com
+49 (0)2381 48205 - 0
hauschild-speedmixer.com

Hauschild
SpeedMixer®


THE BEAUTY OF **PRECISION**

Technical Data

| Specification | DAC 150.1 FV (-K) | DAC 150.1 FVZ (-K) | DAC 250.1 FV (-K) | DAC 250.1 FVZ (-K) |
|--|----------------------|----------------------|----------------------|----------------------|
| Mixing Capacity Min/Max ¹ : | 5g ÷ 150g | 5g ÷ 150g | 5g ÷ 250g | 5g ÷ 250g |
| Speed Min/Max: | 300 rpm ÷ 3500 rpm | 300 rpm ÷ 3500 rpm | 350 rpm ÷ 2500 rpm | 350 rpm ÷ 2500 rpm |
| Mixing Time Min/Max: | 5s ÷ 60s | 5s ÷ 300s | 5s ÷ 60s | 5s ÷ 300s |
| Voltage - Frequency: | 110-240 V ~ 50-60 Hz | 110-240 V ~ 50-60 Hz | 110-240 V ~ 50-60 Hz | 110-240 V ~ 50-60 Hz |
| Input Power: | 0,5 KW | 0,5 KW | 0,5 KW | 0,5 KW |
| Height - Closed Lid: | 465 mm | 465 mm | 465 mm | 465 mm |
| Height - Open Lid: | 630 mm | 630 mm | 630 mm | 630 mm |
| Width: | 280 mm | 280 mm | 280 mm | 280 mm |
| Depth: | 315 mm | 315 mm | 315 mm | 315 mm |
| Weight: | 28 kg | 28 kg | 28 kg | 28 kg |
| Programmable: | 2 Programs | 2 Programs | 2 Programs | 2 Programs |

¹ Including material, jar, and holder.

**The Original
Hauschild
SpeedMixer® DAC
Configurations at a
Glance**

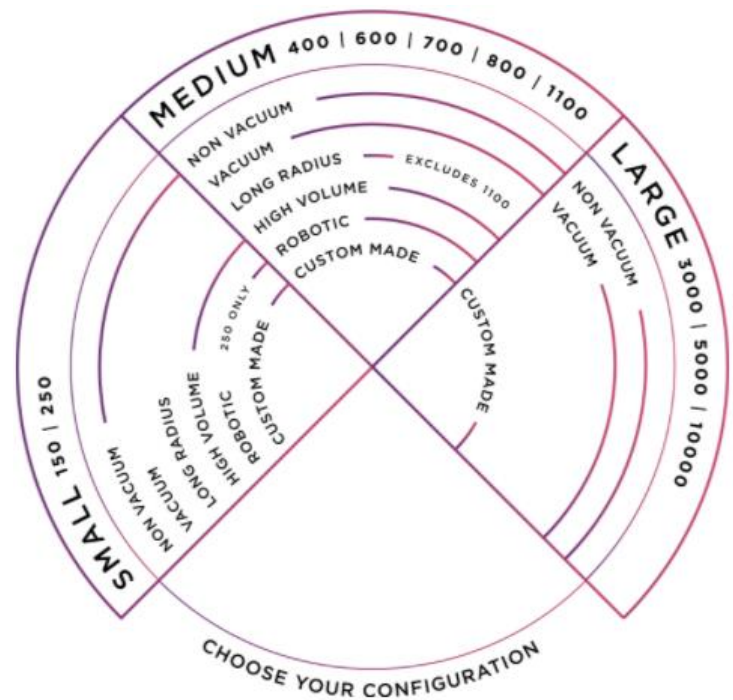

EXPERIENCE THE BEAUTY OF ACCURACY + ROI
ENGINEERED INTO EVERY HAUSCHILD SPEEDMIXER®

Hauschild GmbH & Co. KG

info@hauschild-speedmixer.com

+49 (0)2381 48205 - 0

hauschild-speedmixer.com

Hauschild
SpeedMixer®

THE BEAUTY OF PRECISION