

M Series

NOTHING PERFORMS
LIKE A HAUSCHILD SPEEDMIXER®

BLENDING RELIABILITY, EFFICIENCY,
ACCURACY & SAFETY BEAUTIFULLY



DAC 400.1 / 1100.1 FVZ

STANDARD FEATURES ON ALL DAC MACHINES

150 | 250 | 400 | 600 | 700 | 800 | 1100 | 3000 | 5000 | 10000



THE GOLD
STANDARD
IN BLADELESS
MIXING

LEGENDARY
ACCURACY &
REPEATABILITY

UNPARALLELED
QUALITY &
RELIABILITY

FAST, EFFICIENT,
VIRTUALLY
INDESTRUCTIBLE

NO
CLEANING
REQUIRED

CUSTOM
CONFIGURATIONS
& SOLUTIONS

Hauschild GmbH & Co. KG

info@hauschild-speedmixer.com
+49 (0)2381 48205 - 0
hauschild-speedmixer.com

 **Hauschild**
SpeedMixer®

THE BEAUTY OF *PRECISION*


Technical Data

	DAC 400.1 FVZ	DAC 600.1 FVZ	DAC 700.1 FVZ	DAC 800.1 FVZ
Mixing Capacity Min/Max:	100g ÷ 400g	200g ÷ 600g	300g ÷ 700g	400g ÷ 800g
Speed Min/Max:	800 rpm ÷ 2750 rpm	800 rpm ÷ 2350 rpm	800 rpm ÷ 2100 rpm	800 rpm ÷ 1950 rpm
Mixing Time Min/Max:	5s ÷ 600s	5s ÷ 600s	5s ÷ 600s	5s ÷ 600s
Voltage - Frequency:	230 V – 50/60 Hz	230 V – 50/60 Hz	230 V – 50/60 Hz	230 V – 50/60 Hz
Input Power:	1,2 KW	1,2 KW	1,2 KW	1,2 KW
Height – Open Lid:	960 mm	960 mm	960 mm	960 mm
Width:	440 mm	440 mm	440 mm	440 mm
Depth:	640 mm	640 mm	640 mm	640 mm
Weight:	71 kg	77 kg	80 kg	80 kg
Programmable:	20 Programs	20 Programs	20 Programs	20 Programs

	DAC 1100.1 FVZ
Mixing Capacity Min/Max:	800g ÷ 1100g
Speed Min/Max:	800 rpm ÷ 1600 rpm
Mixing Time Min/Max:	5s ÷ 600s
Voltage - Frequency:	230 V – 50/60 Hz
Input Power:	1,2 KW
Height – Open Lid:	1030 mm
Width:	440 mm
Depth:	640 mm
Weight:	90 kg
Programmable:	20 Programs

¹ Including material, jar and holder.

The Original Hauschild SpeedMixer® DAC Configurations at a Glance

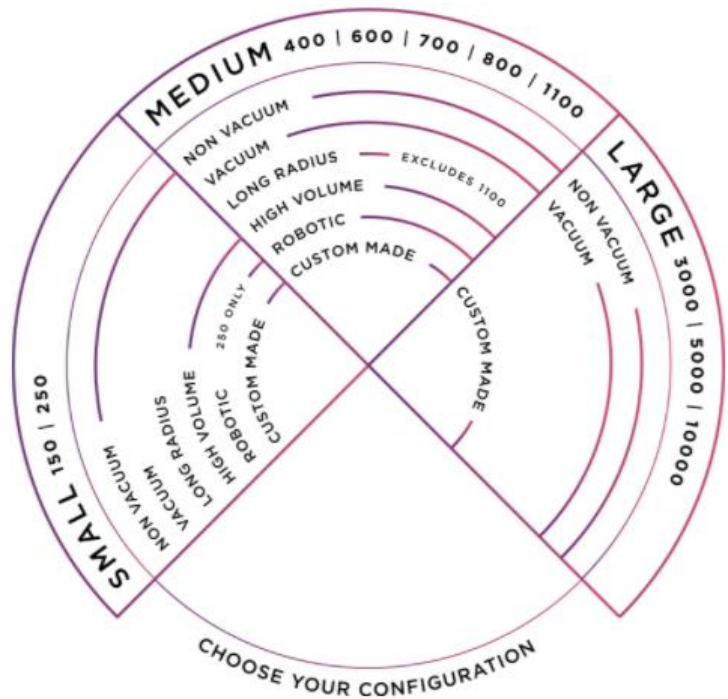

EXPERIENCE THE BEAUTY OF ACCURACY + ROI
ENGINEERED INTO EVERY HAUSCHILD SPEEDMIXER®

Hauschild GmbH & Co. KG

info@hauschild-speedmixer.com
+49 (0)2381 48205 - 0
hauschild-speedmixer.com

Hauschild
SpeedMixer®

THE BEAUTY OF PRECISION